HANDLE HOUSE & THINGS

Installation instructions for Sliding Cavity Door Lock

Step 1. Door Preparation

- Fold template where indicated.
- Position template on door edge at desired latch height.
- Firmly hold template and mark latch height and escutcheon hole centre at required backset.(refer template).
- Measure door thickness and mark centre.
- Drill 25mm (1") latch hole.

Note: it is important to drill this hole squarely.

- At required backset drill pilot hole – suggested size 3mm (1/8").
- Eniarge hole to 54mm (2 1/8") as reuqired, drilling from both sides of the door.



Step 2. Latch Installation

- Mark and chisel latch faceplate (8) to a recess of 4mm. Use latch faceplate as a template.
- Insert latch into door.
- Fasten with two screws (10) provided.



Step 3. Assembly of Escutcheons

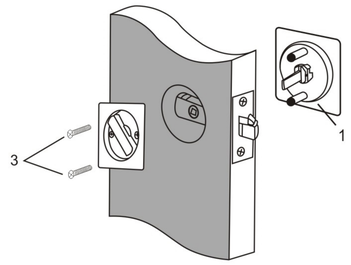

- Assemble the external escutcheon with posts for screws to the door(1).
- Assemble the internal escutcheon with screw holes to the door.
- Fasten escutcheons with screws provided(7).
- Check the latch moves freely –readjust escutcheons if required.

Step 4. Door Jamb Preparation

- Place the strike plate (12) on end of extended latch (14) and close door so the strike plate touches the jamb.
- Keeping the strike plate aperture evenly spaced around the latch, use the strike plate as a template to mark a cut-out on the jamb.
- Chisel the strike plate recess to a depth of 1.6mm.



Step 5. Strike Plate Installation

- Using the template provided, drill two 19mm (3/4") diamater holes 15mm (5/8") deep to recess the latchbolt.
- Fit and fasten the strike plate (12) with screws provided (13).



NOTE: Carefully follow these instructions when installintg. Do not overtighten screws. Use of power drill is not recommended.

PROBLEMS AFTER FITTING

A: If the latch won't enter the strike plate, reposition strike plate on jamb.
B: If the door gap is too big, recess the strike plate deeper into the jamb.

Installation template for Sliding Cayity Door Lock

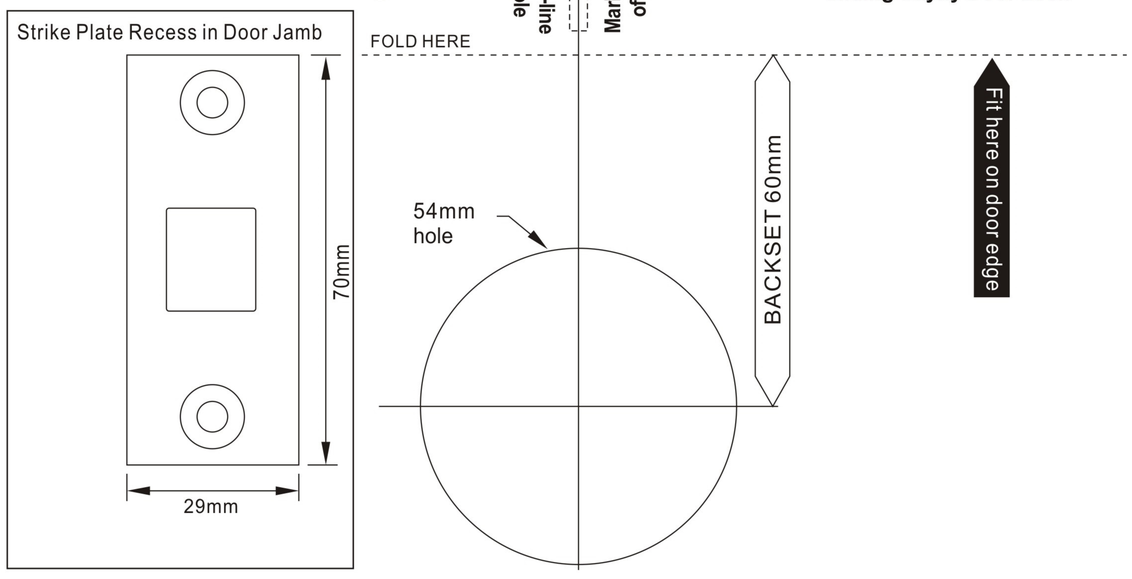
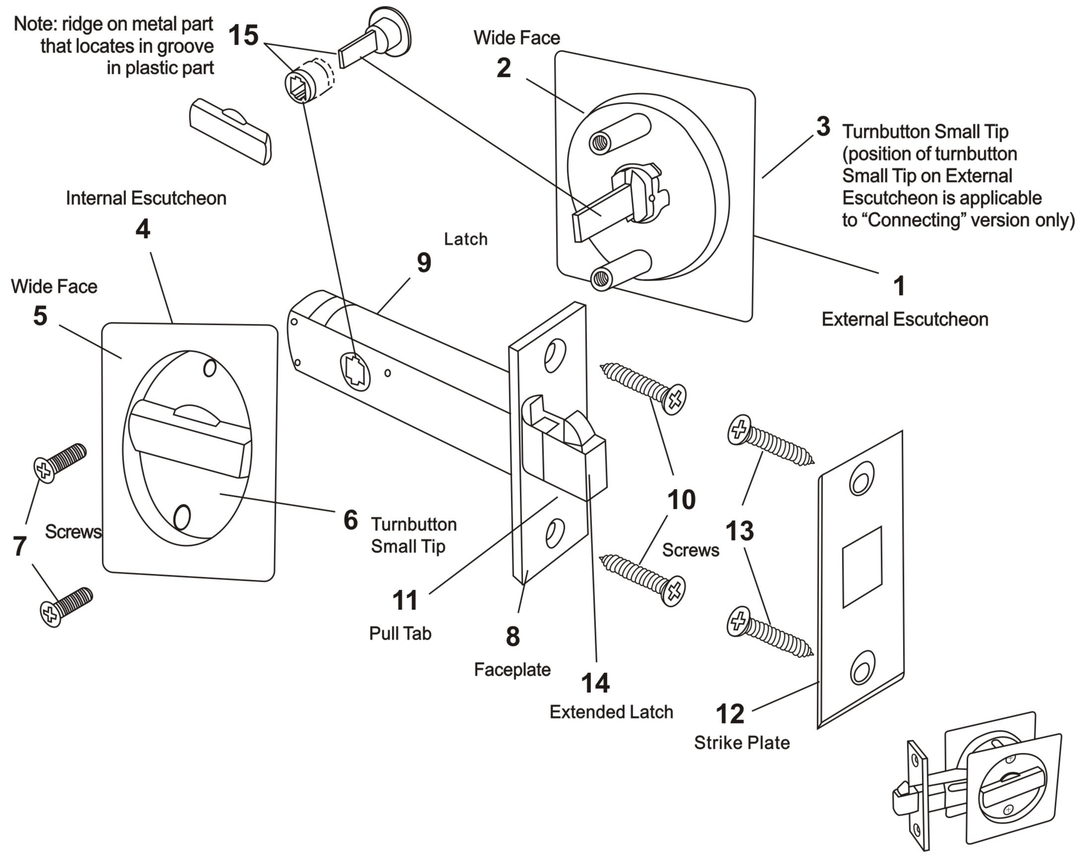
Installation instructions for Sliding Cavity Door Lock